




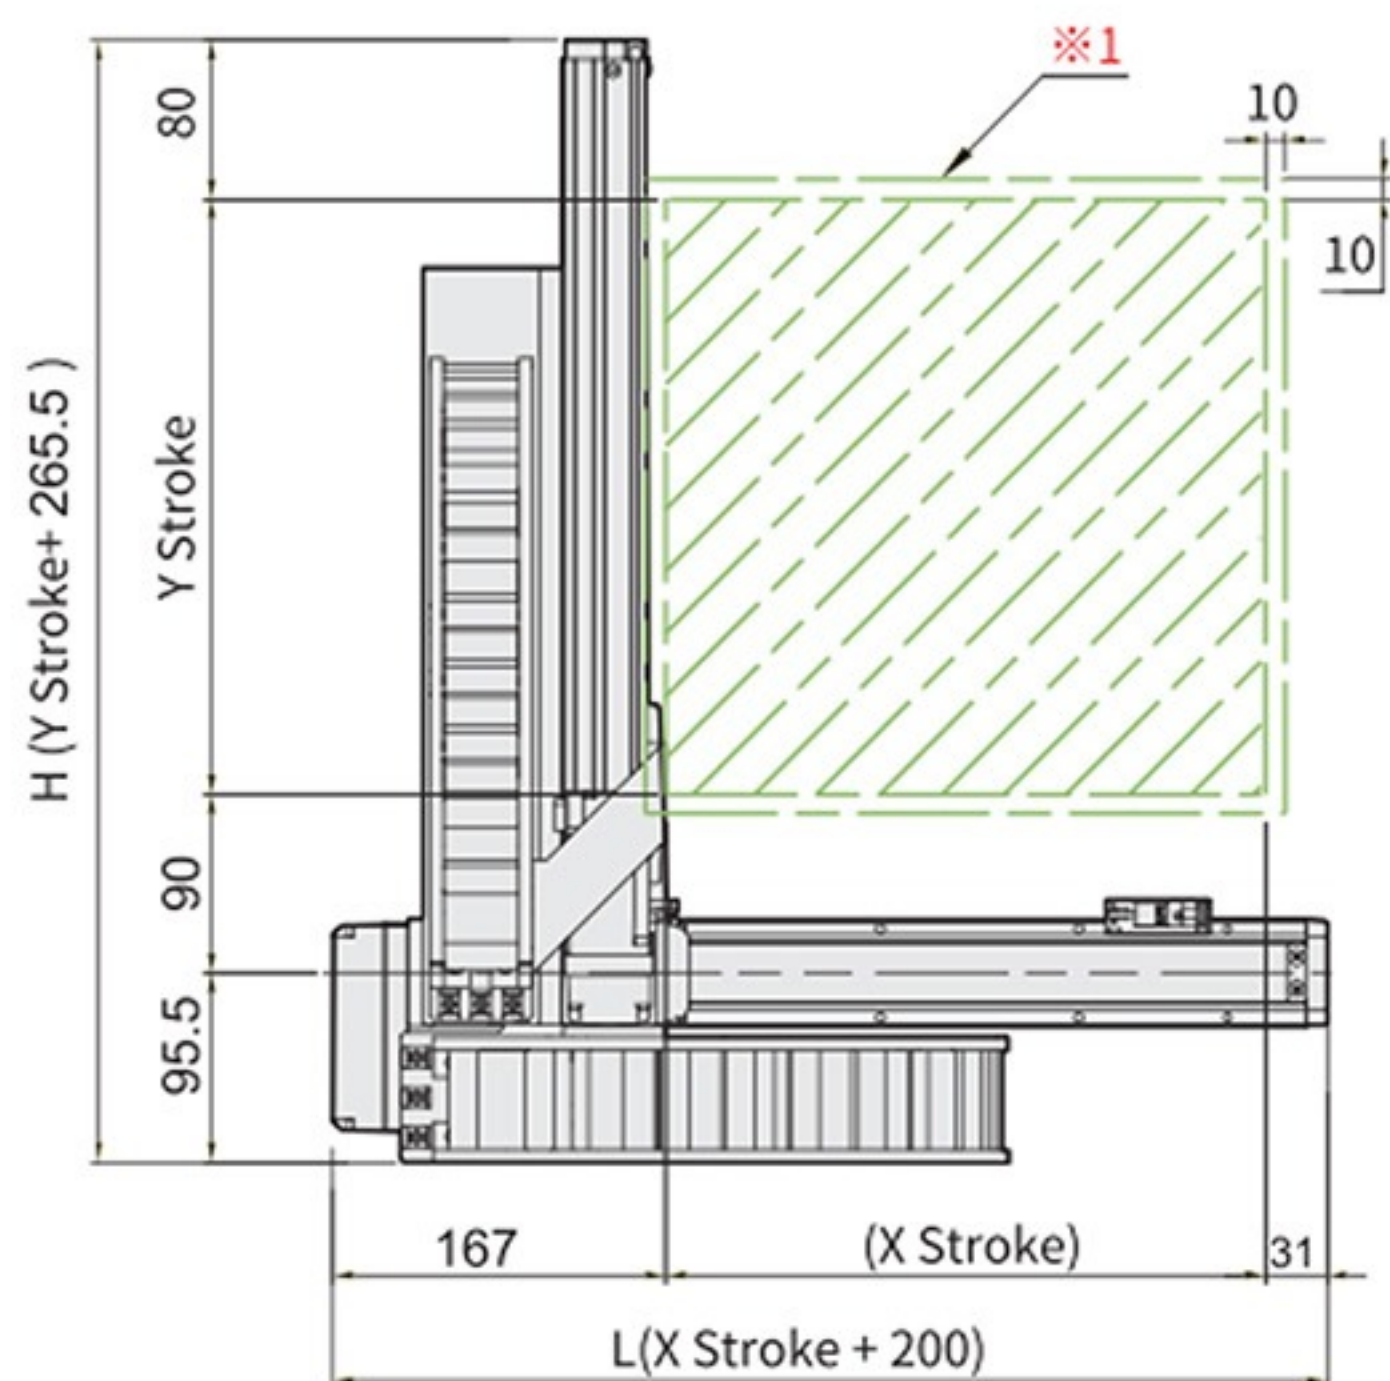




XY-Cable Chain

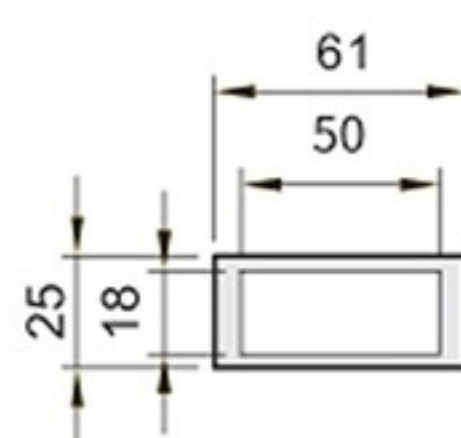


A-Detail View

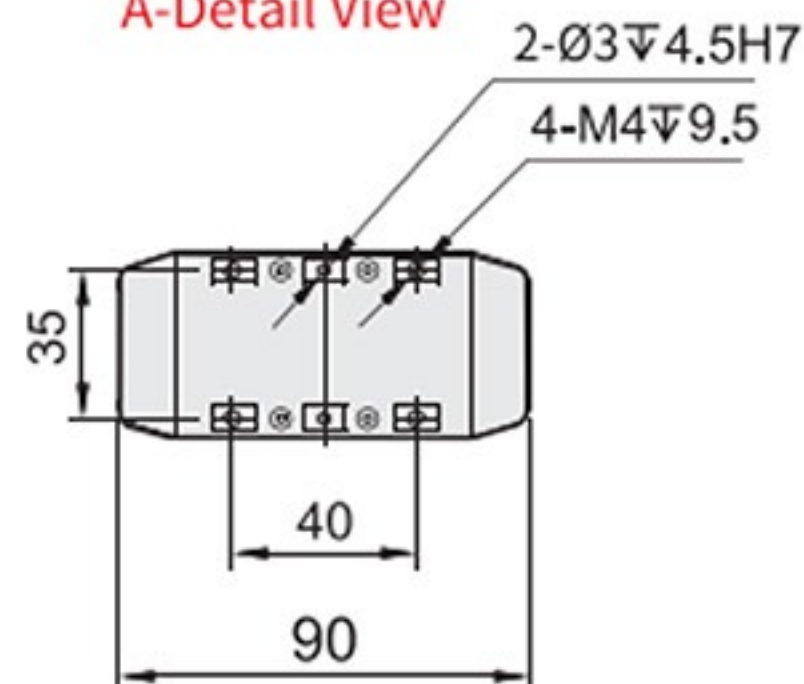

C-Detail View

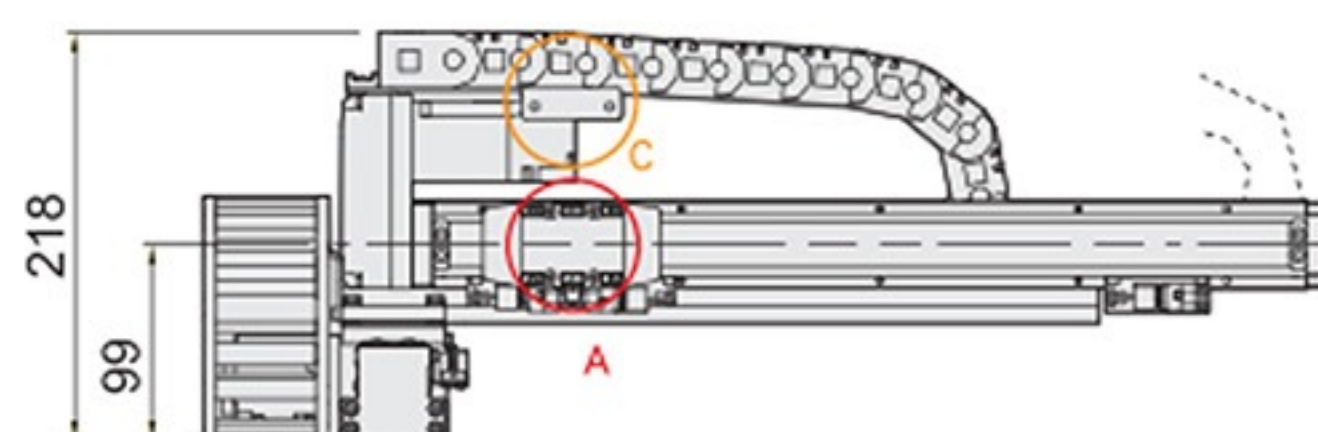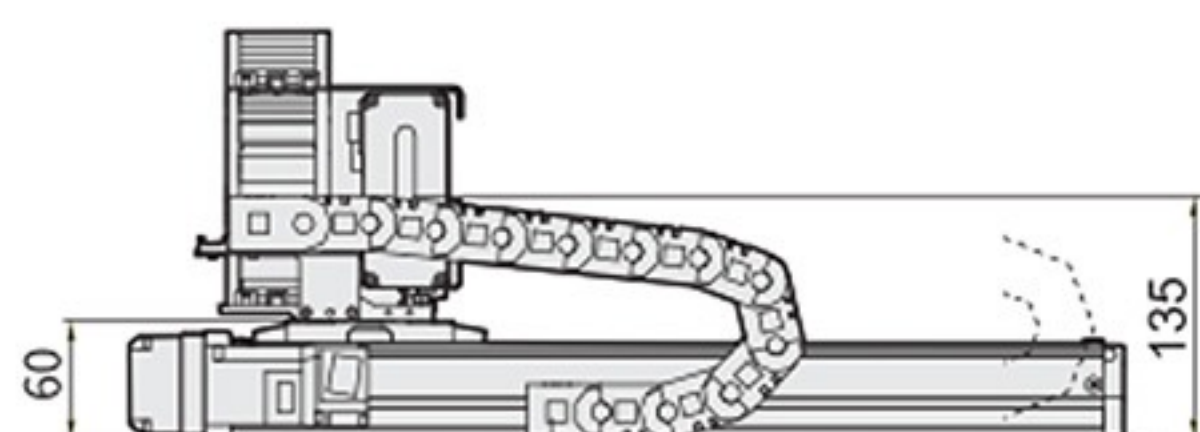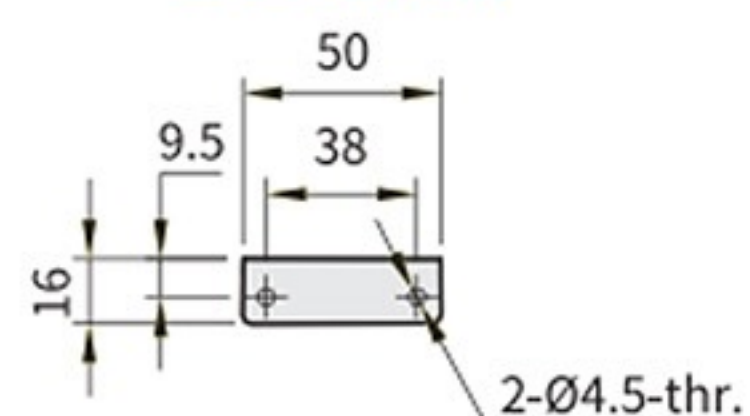

B-Detail View

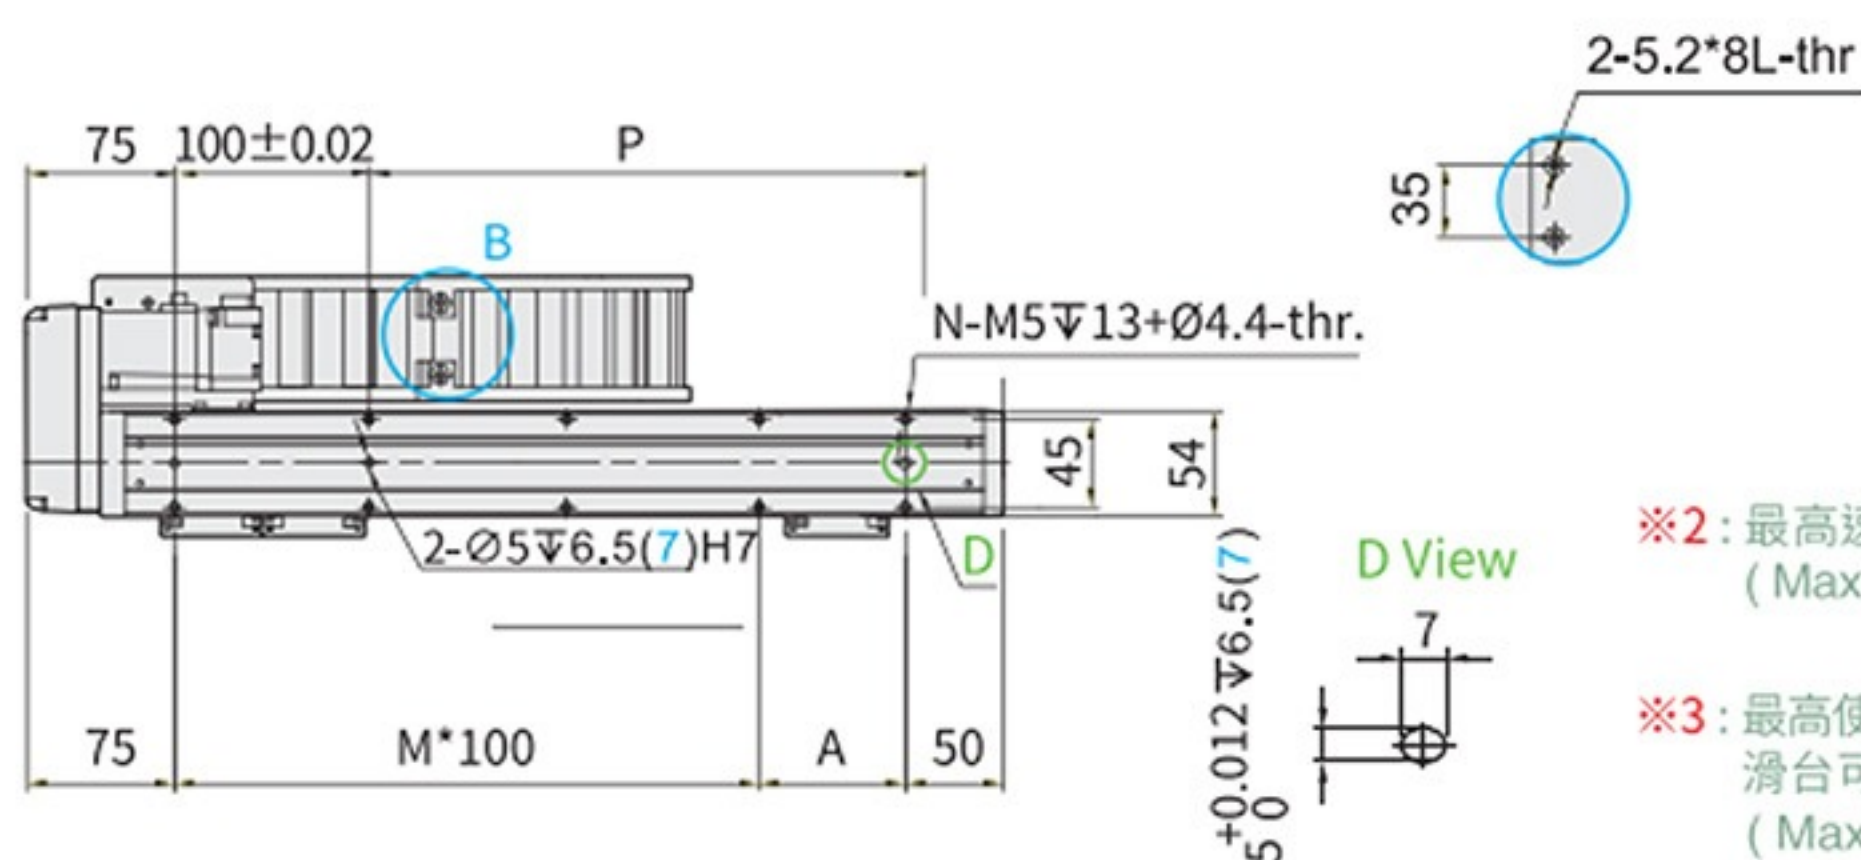


※1: 原點回復時的移動範圍及機械極限的停止位置。  
(When the moving range return to origin, the stop position of table's movement range and mechanical limit.)

※2: 最高速度(mm/s)是以伺服馬達最高轉速3000rpm/min為基準。  
(Maximum speed is based on the AC servo motor's 3000 RPM)

※3: 最高使用速度代表該行程內可使用的最高安全速度，若超過此速度，滑台可能有嚴重共振產生。  
(Maximum speed refers to the highest safe speed that can be used in stroke, if more than the standard speed, table may produce serious resonance.)

| X軸有效行程<br>X Stroke (mm)        | 50        | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | 700 | 750 | 800  |
|--------------------------------|-----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| L                              | 250       | 300 | 350 | 400 | 450 | 500 | 550 | 600 | 650 | 700 | 750 | 800 | 850 | 900 | 950 | 1000 |
| A                              | 25        | 75  | 25  | 75  | 25  | 75  | 25  | 75  | 25  | 75  | 25  | 75  | 25  | 75  | 25  | 75   |
| M                              | 1         | 1   | 2   | 2   | 3   | 3   | 4   | 4   | 5   | 5   | 6   | 6   | 7   | 7   | 8   | 8    |
| N                              | 6         | 6   | 8   | 8   | 10  | 10  | 12  | 12  | 14  | 14  | 16  | 16  | 18  | 18  | 20  | 20   |
| P                              | 25        | 75  | 125 | 175 | 225 | 275 | 325 | 375 | 425 | 475 | 525 | 575 | 625 | 675 | 725 | 775  |
| 最高使用速度<br>Maximum speed (mm/s) | 1000 ※2※3 |     |     |     |     |     |     |     |     |     |     |     | 900 | 800 | 700 | 600  |

| Y軸有效行程<br>Y Stroke (mm)        | 100   | 150   | 200   | 250   | 300   |
|--------------------------------|-------|-------|-------|-------|-------|
| H                              | 365.5 | 415.5 | 465.5 | 515.5 | 565.5 |
| 最高使用速度<br>Maximum speed (mm/s) | 500   |       |       |       |       |

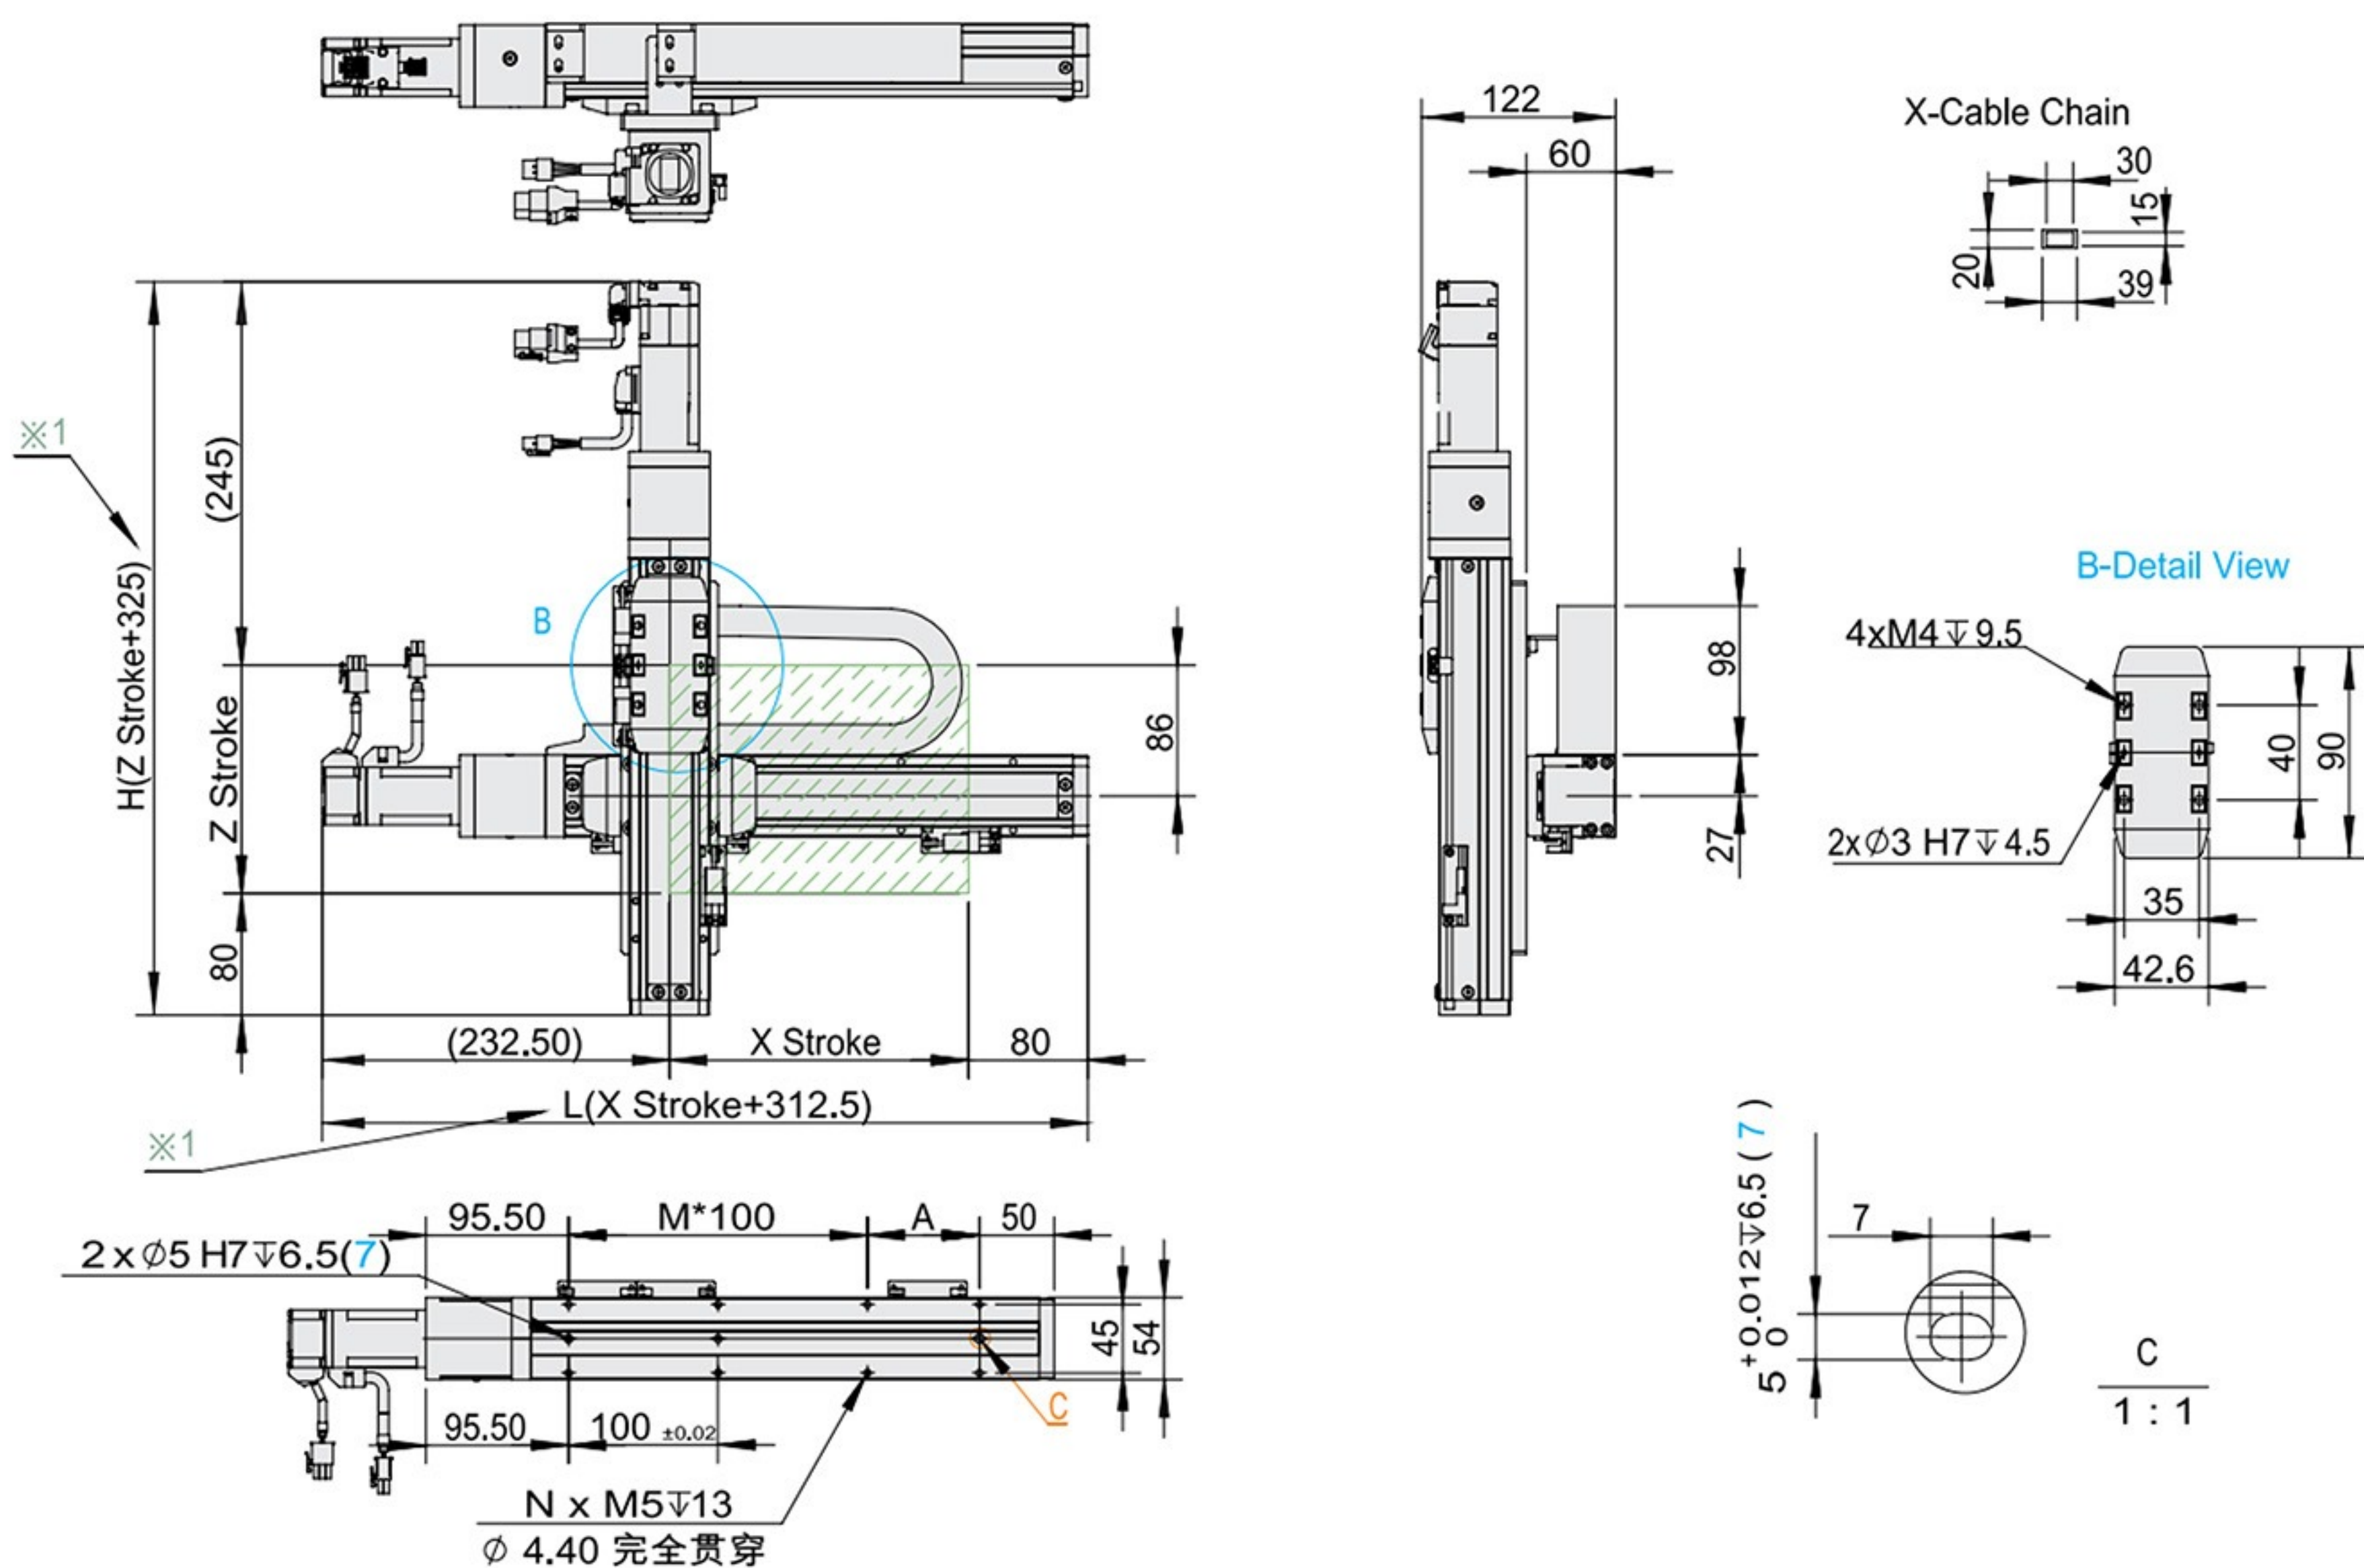

※1: Z軸總高度會依搭配的馬達廠牌及型號而變動。  
The total height of Z-axis is depends on different motor's brands.

| X軸行程<br>X Stroke (mm)            | 100   | 150   | 200   | 250   | 300   | 350   | 400   | 450   | 500   | 550   | 600   | 650   | 700    | 750    | 800    |
|----------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| L                                | 412.5 | 462.5 | 512.5 | 562.5 | 612.5 | 662.5 | 712.5 | 762.5 | 812.5 | 862.5 | 912.5 | 962.5 | 1013.5 | 1063.5 | 1113.5 |
| A                                | 75    | 25    | 75    | 25    | 75    | 25    | 75    | 25    | 75    | 25    | 75    | 25    | 75     | 25     | 75     |
| M                                | 1     | 2     | 2     | 3     | 3     | 4     | 4     | 5     | 5     | 6     | 6     | 7     | 7      | 8      | 8      |
| N                                | 6     | 8     | 8     | 10    | 10    | 12    | 12    | 14    | 14    | 16    | 16    | 18    | 18     | 20     | 20     |
| 最高使用速度<br>Maximum Speed (mm/s)※4 | 500   |       |       |       |       |       |       |       |       |       |       | 450   | 400    | 350    | 300    |

| Z軸行程<br>Z Stroke (mm)            | 50  | 100 | 150 | 200 | 250 |
|----------------------------------|-----|-----|-----|-----|-----|
| H                                | 375 | 425 | 475 | 525 | 575 |
| 最高使用速度<br>Maximum Speed (mm/s)※4 | 250 |     |     |     |     |

※4: 最高使用速度代表該行程內可使用的最高安全速度，若超過此速度，滑台可能有嚴重共振產生。  
Maximum speed is refers to the highest safe speed that can be used in stroke, if more than the standard speed, it may occur serious resonance.